


HARDWOOD SYSTEMS

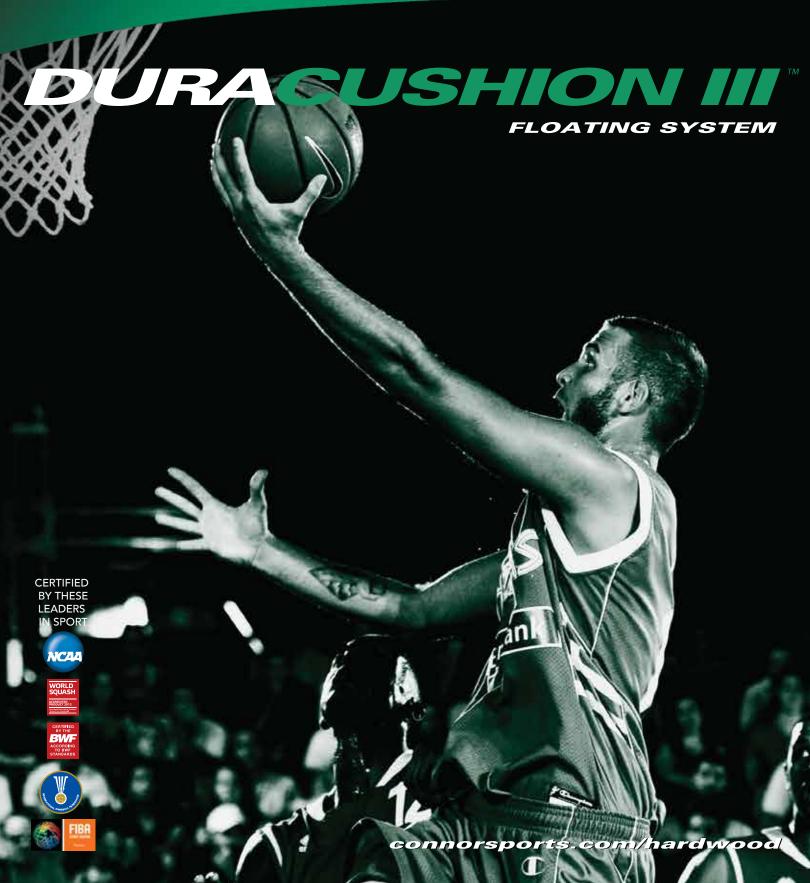

DURACUSHION III


FLOATING SYSTEM

Connor Sports • 800.283.9522 • 847.290.9020 • info@connorsports.com • connorsports.com/hardwood





DuraCushion III provides an added plywood subfloor layer supported by standard PVC DuraCushion padded softwood dimensioned sleepers.

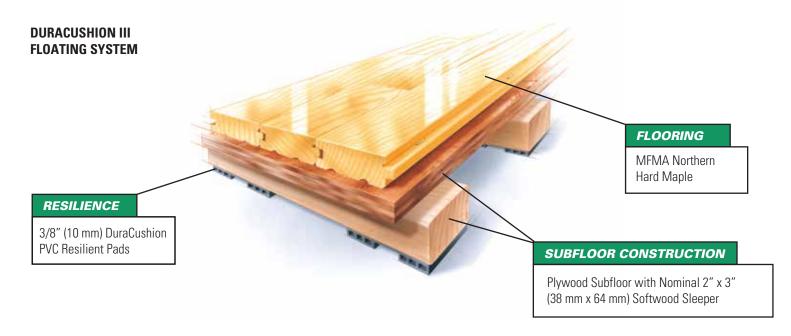

Slab Depression: 3/8" (10 mm) pad: 25/32" (20 mm) flooring - 31/8" (79 mm) • 33/32" (26 mm) flooring - 33/8" (86 mm) • 5/8" (16 mm) pad: 25/32" (20 mm) flooring - 33/8" (86 mm) • 33/32" (26 mm) flooring - 35/8" (92 mm)

Wall Base Detail Threshold Detail (Optional Accessory) Equipment Detail (Optional Accessory) Aluminum Threshold 3" x 4" (76 mm x 102 mm) /ented Rubber Base 15/32" (12 mm) APA Sheeting 2" (51 mm) Expansion Space Connor Sports 3/8" (10 mm) PVC Pad 15/32" (12 mm) APA Sheeting 2" (51 mm) Connor Sports 3/8" (10 mm) PVC Pad Floor Plate DuraCushion Sleeper Expansion Space DuraCushion Sleeper 25/32" x 2-1/4" (20 mm x 57 mm) Laytite Maple 25/32" x 2-1/4" Vapor Barrier 2" (51 mm) Expansion Space . Vapor Barrier (20 mm x 57 mm) Laytite Maple Equipment Sleeve 3-1/8" (79 mm) 3-1/8" (79 mm) Concrete Slab Concrete Slab 0.0.0.0.0.0 0 0 0 0 0 0 0 0 0 0





Testing Laboratory: United States Sports Surfacing Laboratory





Green StatusManaged Forests, Certification Available



Environmental Product Declaration

The First Sports Floor Manufacturer to Publish UL Certified Product-Specific Environmental Performance In Compliance with LEED V.4