



CONNOR SPORTS

NEOSHOK™

FLOATING SYSTEM



CHAMPIONS OF
SPORT



connorsports.com



NeoShok provides the option for specific resilient hardness values to reach performance levels targeted for particular activities associated with the main function of the facility.

NEOSHOK FLOATING SYSTEM

RESILIENCE

Two-Stage Polyurethane NeoShok Pads
Step 1. Responsive to Light Loads
Step 2. Responsive to Aggressive Loads



FLOORING


MFMA Northern
Hard Maple

SUBFLOOR CONSTRUCTION


Two Layers of 15/32" (12 mm) APA Rated
Plywood Subfloor

Slab Depression: 25/32" (20 mm) flooring – 2-1/2" (64 mm) • 33/32" (26 mm) flooring – 2 3/4" (70 mm)


Wall Base Detail

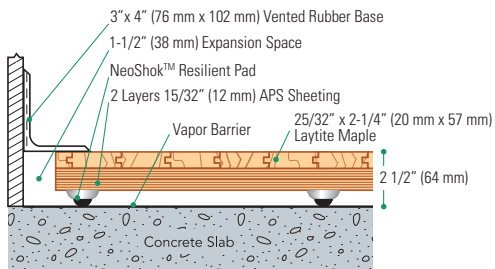

Threshold Detail (Optional Accessory)

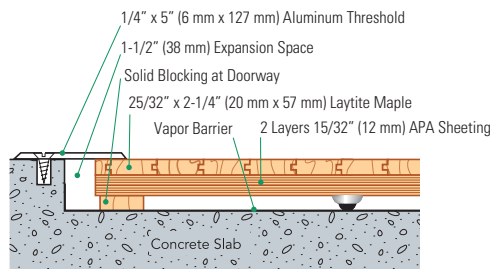

Equipment Detail (Optional Accessory)

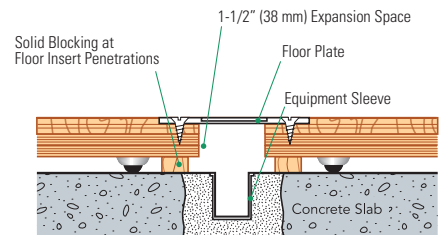

Manufacturing:
ISO 14001:2004
CERTIFIED

Testing Laboratory:
United States Sports
Surfacing Laboratory



Certified Testing:
ISSS Scientific
Body Membership



Green Status
Managed Forests,
Certification Available



Environmental Product Declaration
The First Sports Floor Manufacturer to Publish UL
Certified Product-Specific Environmental
Performance In Compliance with LEED V.4

For more information on NeoShok, call 800-283-9522 or 847-290-9020. Email us at info@connorsports.com.