




FIXTURE PROVIDED
BY STEVENS SALES
C3025G.

PHOTOCELL PROVIDED
BY STEVENS SALES.
INTERMATIC LONG LIFE
LED PHOTOCELL

LEDgine Specifications:

- 140, 3000K (warm) LEDs, typical 75 Color Rendering Index (CRI), >100,000 hours of operational life (at 25°C ambient temperature & 70% lumen maintenance), injection molded Type 3 or Type 5 (specify) optical plates, IP66 rated optical system.
- Integral Advance Xitanium LED driver, class 1, IP66 rated, 2100mA, IntelliVolt 120-277 VAC, 50-60 Hz, RoHS compliant, field replaceable 10kV/10kA surge suppression.
- Type 5 optics; Delivered lumens: 8467, Wattage: 94W.
- Type 3 optics; Delivered lumens: 7316, Wattage: 94W.
- Field Adjustable Wattage Switch (FAWS)

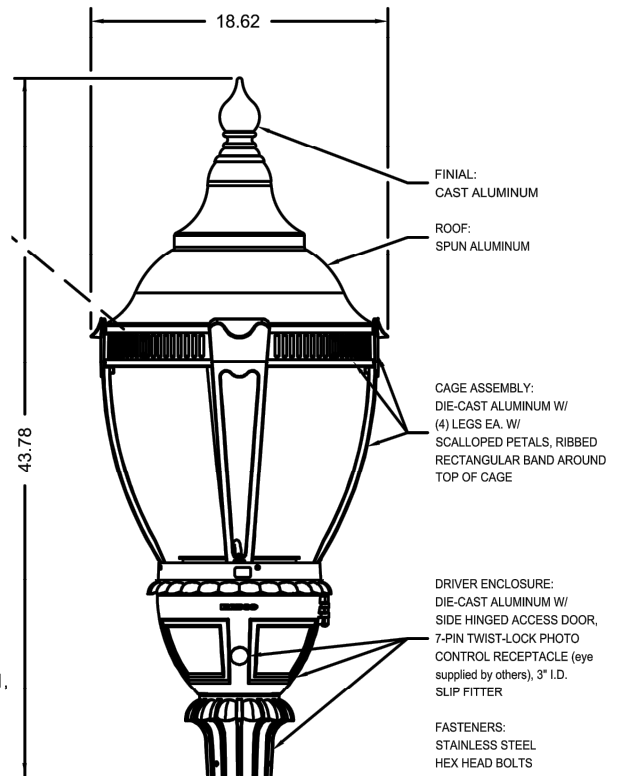


Luminaire Specifications:

- UL8750 & UL1598 compliant, ETL/cETL listed to U.S. & Canadian standards for wet locations, manufactured to ISO 9001:2008 standards, LM79 & LM80 tested.

14'-0"
(168")




EXTRUDED ALUMINUM
FLUTED POLE SHAFT -
.250 WALL; 5" x 14";
14 FLUTE
BLACK POWDER COATED

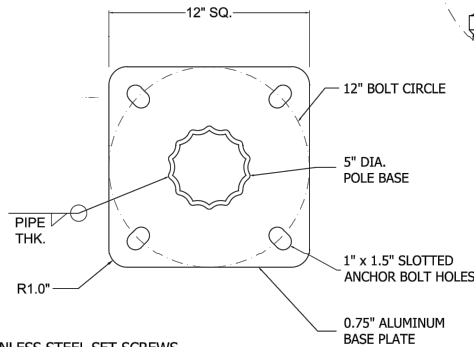

(4) STAINLESS STEEL SET SCREWS
TO SECURE BASE COVER TO POLE
SHAFT & PREVENT MOVEMENT/LIFTING

ELECTRIC HAND HOLE

2-PIECE DECORATIVE CAST ALUMINUM
CLAMP AROUND BASE COVER

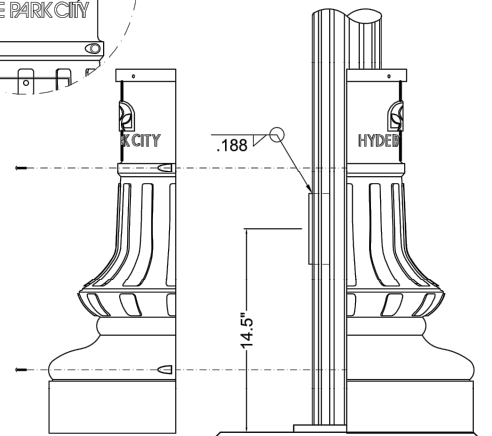

DRAWN	DZ	SSCO SINCE 1914 STEVENS SALES COMPANY STREET LIGHTING SOLUTIONS
CHK		
FINISH TYPE	POWDER	
FINISH COLOR	BLACK	
REVISION	1A	
APPROVED SIGNATURE:		
CONTACT: BRAD SNELGROVE WITH STEVENS SALES COMPANY CELL: 801-989-8652 OFFICE: 801-487-8971 BRAD@SSCO.NET		
SIZE	PART # C3025G	DWG # C3025G DWG07
	BCWAR1827_ANTR-500250168-14F-PT	K-051622-1S
DESC	HYDE PARK	
		SHEET 1/1

OR APPROVED EQUAL

HYDE PARK CITY

113 EAST CENTER
HYDE PARK, UTAH 84318
TEL: (435) 563-6507



STANDARD STREET
LIGHT POLE

RD-06A

DATE: 03-13-24